


# ORDERING MATRIX

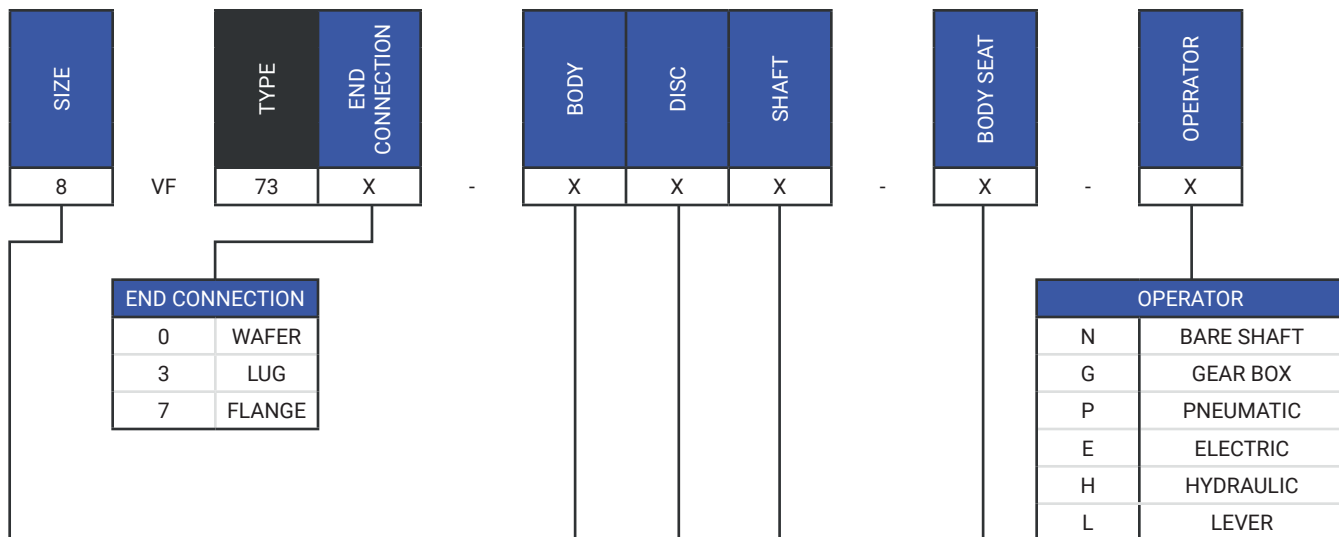

END CONNECTION	
0	WAFER
3	LUG
7	FLANGE

OPERATOR	
N	BARE SHAFT
G	GEAR BOX
P	PNEUMATIC
E	ELECTRIC
H	HYDRAULIC
L	LEVER

SIZE	mm
15	40
2	50
25	65
3	80
4	100
5	125
6	150
8	200
10	250
12	300
14	350
16	400
18	450
20	500
24	600
26	650
28	700
30	750
32	800
34	850
36	900
38	950
40	1000
42	1050
44	1100
48	1200

BODY		DISC		SHAFT	
1	DUCTILE IRON	1	NYLON/DUCTILE IRON (F/P)	0	410 SS - STANDARD ON IRON BODY VALVES
2	CAST IRON	2	NYLON/DUCTILE IRON (U/C)	F	316 SS - STANDARD ON 316 SS BODY VALVES
3	CARBON STEEL			M	304 SS - STANDARD ON 304 SS BODY VALVES
4	316 SS	3	316 SS (F/P)		
5	304 SS	4	316 SS (U/C)		
		5	ALUMINUM BRONZE (F/P)		
		6	ALUMINUM BRONZE (U/C)		
		8	NYLON COATED 316 SS (F/P)		
		10	304 SS (F/P)		
		11	304 SS (U/C)		

BODY SEAT	
1	VITON
2	EPDM
3	EPT WHITE
4	NITRILE
5	EPT BLACK
6	SILICON
7	HYPALON
8	NEOPRENE

**Note:** Example 8VF730-01314XM-ET-N  
 Shall be a: 8" (8) Centric (73) Wafer type (0) CF\* Body (13) CF8M Disc (14) Shaft in XM-19 (XM) Body seat in EPT (ET) Bare shaft (N)

LEGEND	
F/P	FULL PRESSURE/ 230PSI
U/C =	UNDERCUT/ 87PSI

Technical details subject to change without notice.

